




TC - 01

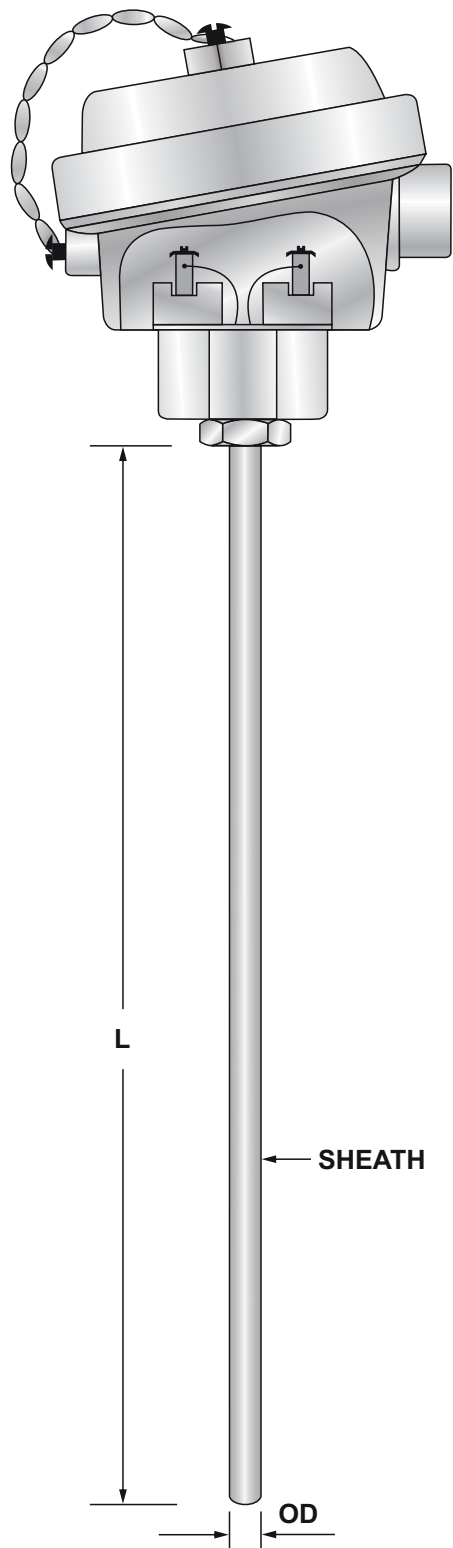

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
310	SS 310
600	Inconel 600

Sheath "OD"

4.7	4.7mm
6	6mm
8	8mm
9.5	9.5mm
19	19mm
O	Consult Factory

Nominal Length "L"

Specify

Process Precision Instruments


📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

📞 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net

THERMOCOUPLE HEAD TYPE WITH FIXED FITTING

TC - 02

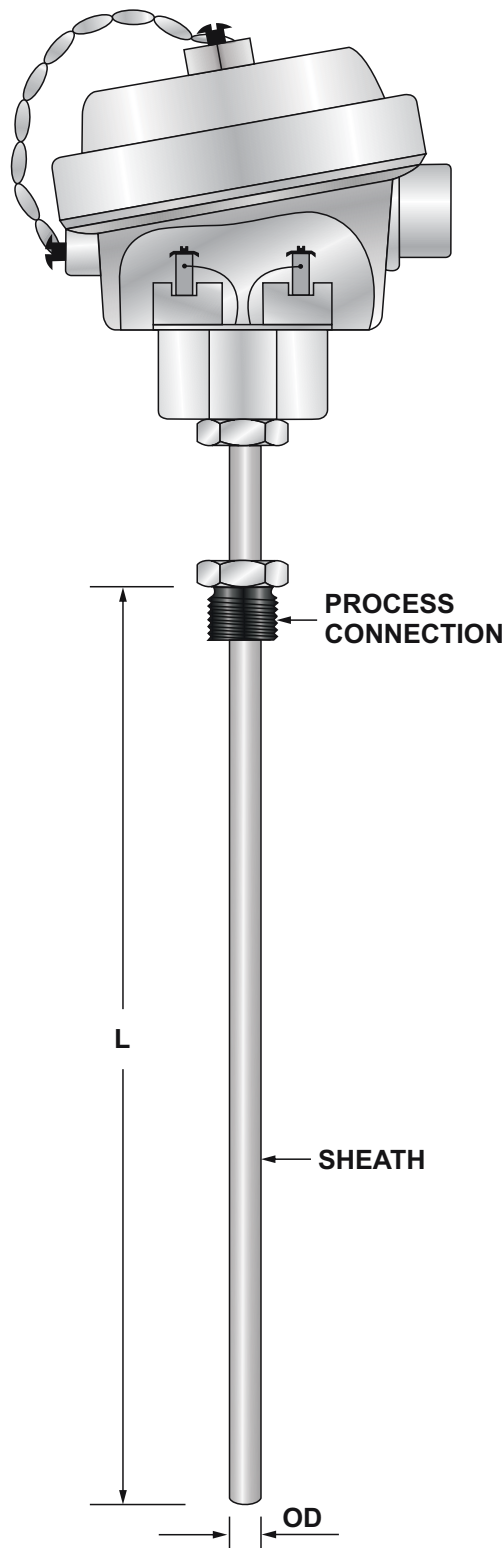

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
310	SS 310
600	Inconel 600

Sheath "OD"

4.7	4.7mm
6	6mm
8	8mm
9.5	9.5mm
19	19mm
O	Consult Factory

Process Connection

Threads BSP / NPT	1/4"	3/8"	1/2"	3/4"
	1"	1 1/4"	1 1/2"	2"
M -Threads	M18 X 1.5		M20 X 1.5	
	M27 X 2		M33 X 2	
O	Consult Factory			

Nominal Length "L"


Specify

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India
 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333
 sales@ppiindia.net www.ppiindia.net

THERMOCOUPLE HEAD TYPE WITH FIXED FITTING

TC - 03

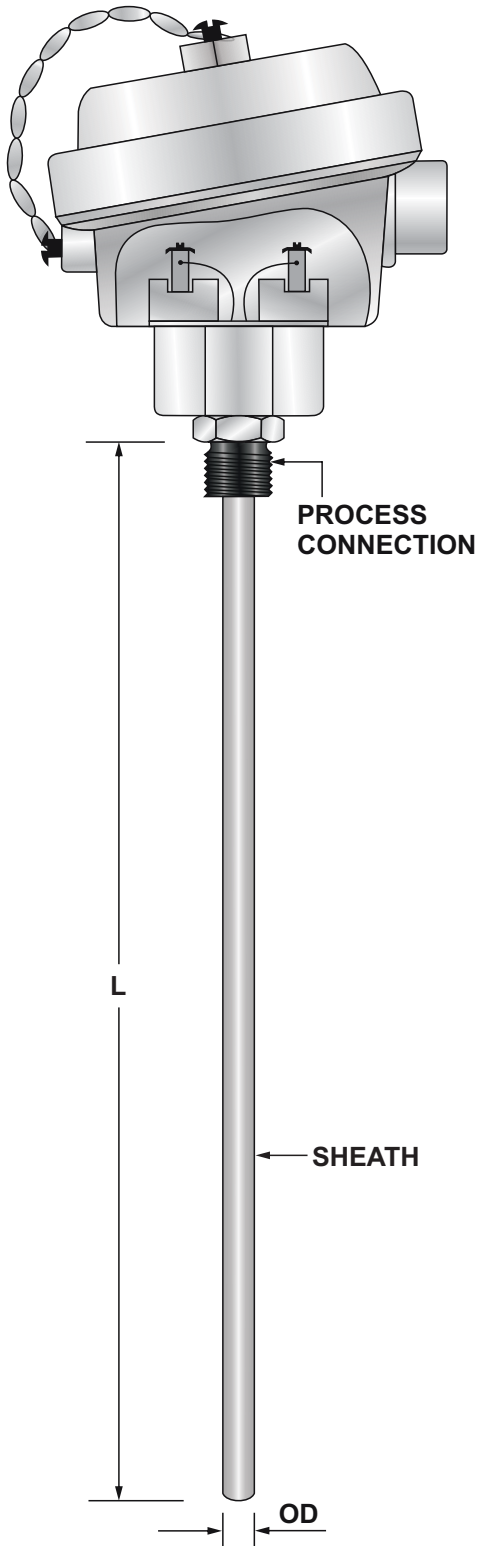

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
310	SS 310
600	Inconel 600

Sheath "OD"

4.7	4.7mm
6	6mm
8	8mm
9.5	9.5mm
19	19mm
O	Consult Factory

Process Connection

Threads BSP / NPT	1/4"	3/8"	1/2"	3/4"
	1"	1 1/4"	1 1/2"	2"
M -Threads	M18 X 1.5		M20 X 1.5	
	M27 X 2		M33 X 2	
O	Consult Factory			

Nominal Length "L"

Specify

Process Precision Instruments


101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net

THERMOCOUPLE HEAD TYPE WITH ADJUSTABLE FITTING

TC - 04

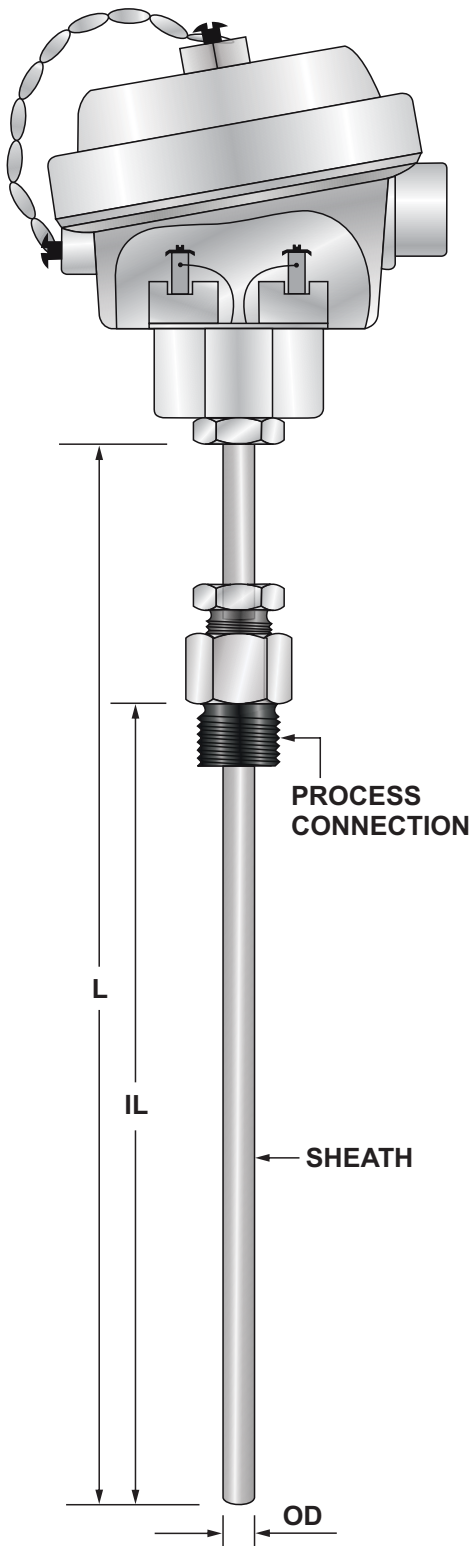


Element		K	Chromel / Alumel
		J	Iron / Constantan
		O	Consult Factory
Configuration		SX	Simplex
		DX	Duplex
Termination		W	Weather Proof Head IP-67
		F	Ex. Proof Head IIA / IIB IP-66
		O	Consult Factory
Junction		GN	Grounded
		UN	Ungrounded
Temp. Range		Specify	
Sheath Material		316	SS 316
		310	SS 310
		600	Inconel 600
Sheath "OD"		4.7	4.7mm
		6	6mm
		8	8mm
		9.5	9.5mm
		19	19mm
		O	Consult Factory
Process Connection		Threads BSP / NPT	1/4" 3/8" 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"
		M -Threads	M18 X 1.5 M20 X 1.5 M27 X 2 M33 X 2
		O	Consult Factory
		Specify	
Nominal Length "L"		Specify	

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India
 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333
 sales@ppiindia.net www.ppiindia.net

THERMOCOUPLE HEAD TYPE WITH ADJUSTABLE OVAL FLANGE

TC - 05

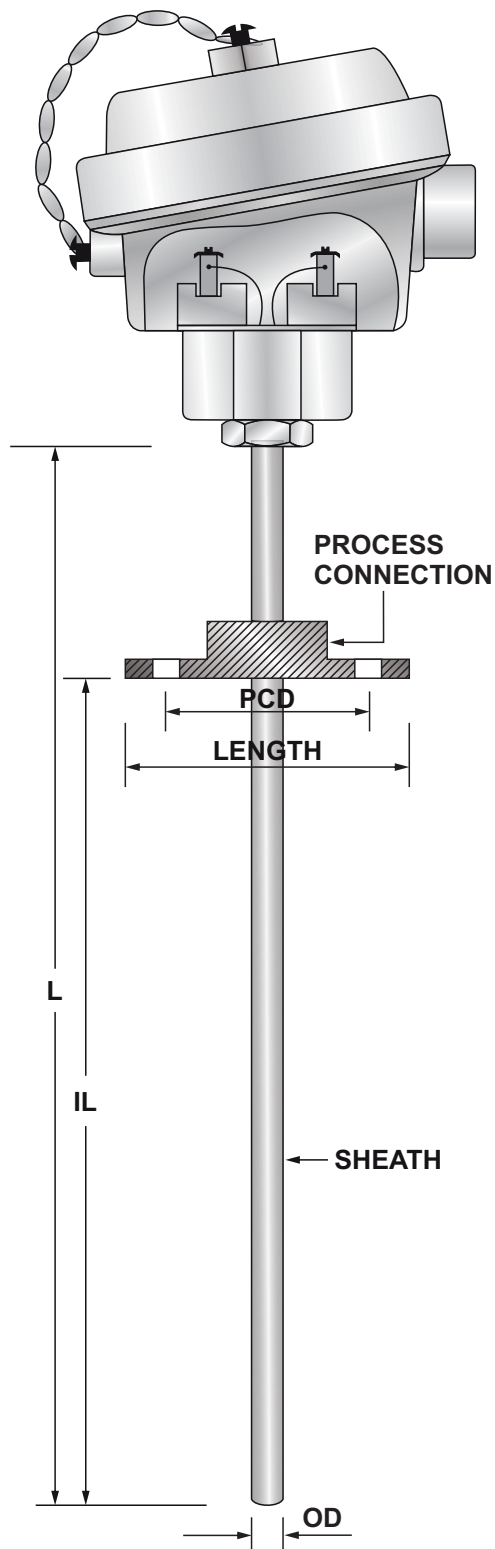

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
310	SS 310
600	Inconel 600

Sheath "OD"

6	6mm
8	8mm
9.5	9.5mm
19	19mm
O	Consult Factory

Process
Connection

OVAL FLANGE (ALUMINIUM)

Nominal
Length "L"

Specify

Process Precision Instruments


101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net

THERMOCOUPLE HEAD TYPE (MINERAL INSULATED)

TC - 06

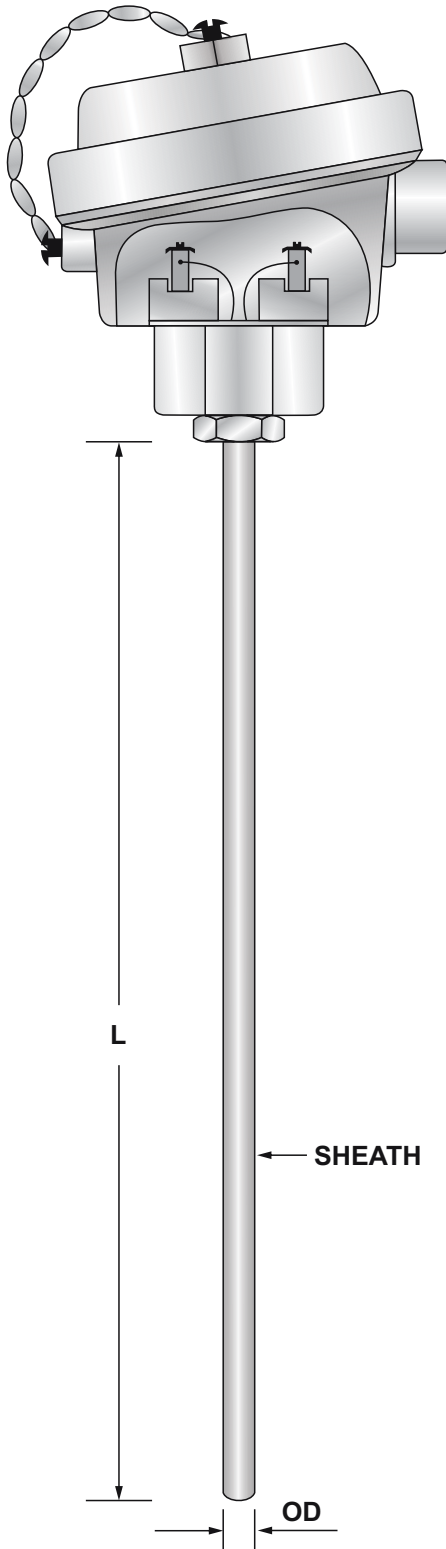

Element

K	Chromel / Alumel
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material
(Flexible)

316	MI SS 316
310	MI SS 310
600	MI Inconel 600

Sheath "OD"

Specify

Nominal
Length "L"

Specify

Process Precision Instruments


101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net

THERMOCOUPLE HEAD TYPE WITH FIXED FITTING (MINERAL INSULATED)

TC - 07

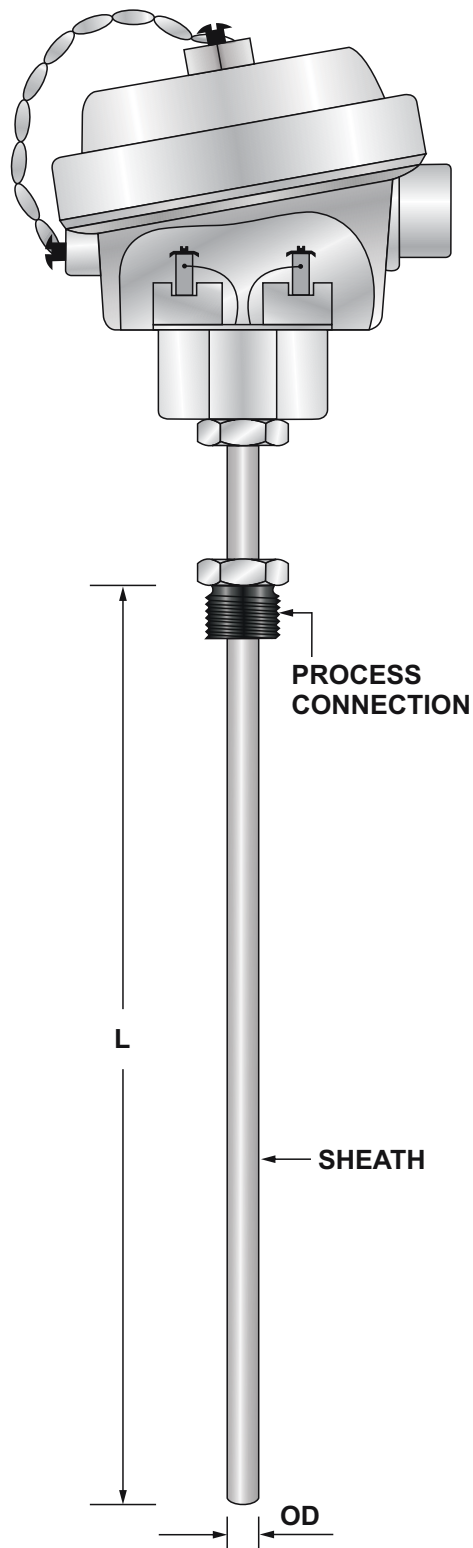

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material
(Flexible)

316	MI SS 316
310	MI SS 310
600	MI Inconel 600

Sheath "OD"

Specify

Process
Connection

Threads BSP / NPT	1/4"	3/8"	1/2"	3/4"
	1"	1 1/4"	1 1/2"	2"
M -Threads	M18 X 1.5		M20 X 1.5	
	M27 X 2		M33 X 2	
O	Consult Factory			

Nominal
Length "L"

Specify

Process Precision Instruments


101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net

THERMOCOUPLE HEAD TYPE WITH FIXED FITTING (MINERAL INSULATED)

TC - 08

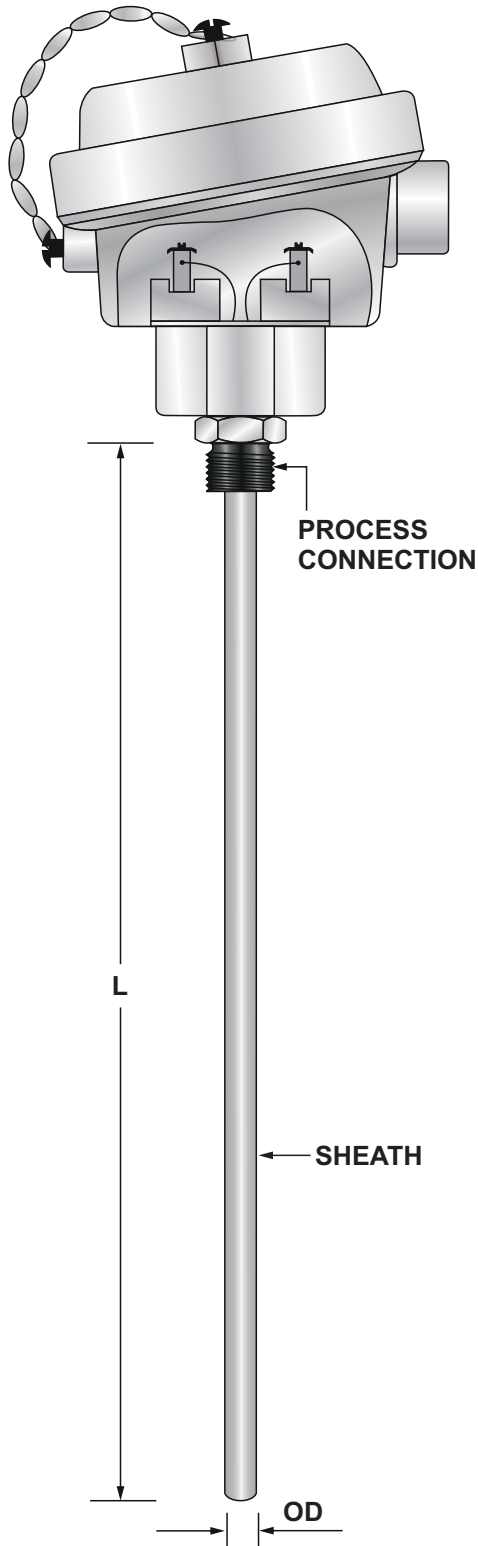

Element		K	Chromel / Alumel
		J	Iron / Constantan
		O	Consult Factory
Configuration		SX	Simplex
		DX	Duplex
Termination		W	Weather Proof Head IP-67
		F	Ex. Proof Head IIA / IIB IP-66
		O	Consult Factory
Junction		GN	Grounded
		UN	Ungrounded
Temp. Range		Specify	
Sheath Material (Flexible)		316	MI SS 316
		310	MI SS 310
		600	MI Inconel 600
Sheath "OD"		Specify	
Process Connection		Threads BSP / NPT	1/4" 3/8" 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"
		M -Threads	M18 X 1.5 M20 X 1.5 M27 X 2 M33 X 2
		O	Consult Factory
Nominal Length "L"		Specify	


Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India
 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333
 sales@ppiindia.net www.ppiindia.net



THERMOCOUPLE HEAD TYPE WITH ADJUSTABLE FITTING (MINERAL INSULATED)

TC - 09

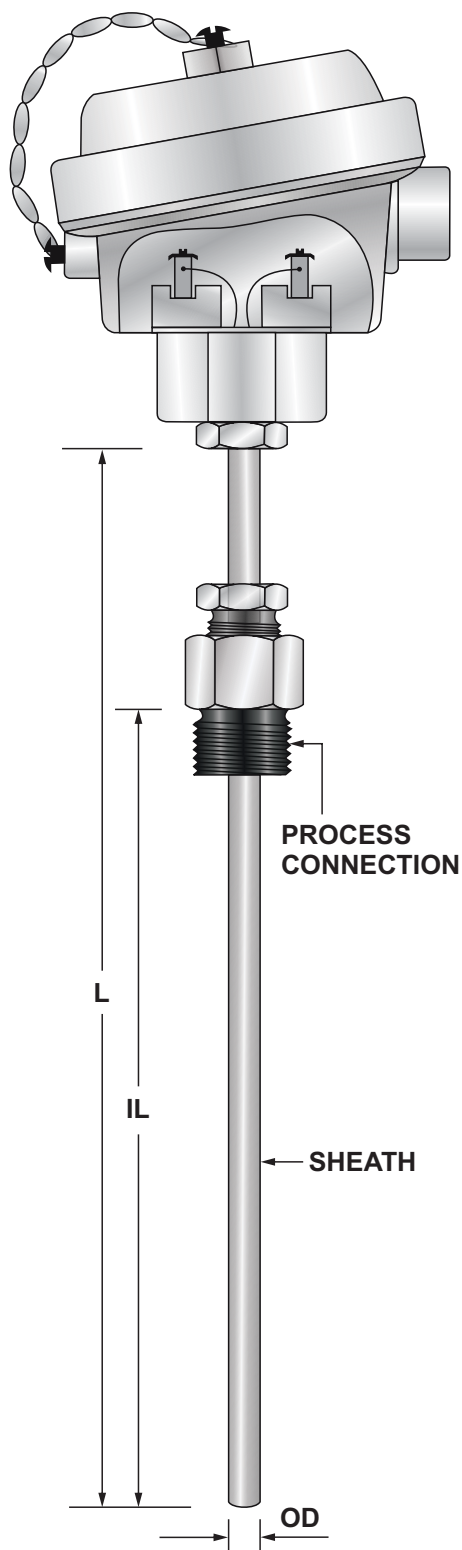

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material
(Flexible)

316	MI SS 316
310	MI SS 310
600	MI Inconel 600

Sheath "OD"

Specify

Process
Connection

Threads BSP / NPT	1/4"	3/8"	1/2"	3/4"
	1"	1 1/4"	1 1/2"	2"
M -Threads	M18 X 1.5		M20 X 1.5	
	M27 X 2		M33 X 2	
O	Consult Factory			

Nominal
Length "L"

Specify

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333


sales@ppiindia.net www.ppiindia.net



PPI
The Perfection Experts

THERMOCOUPLE HEAD TYPE WITH ADJUSTABLE OVAL FLANGE (MINERAL INSULATED)

TC - 10

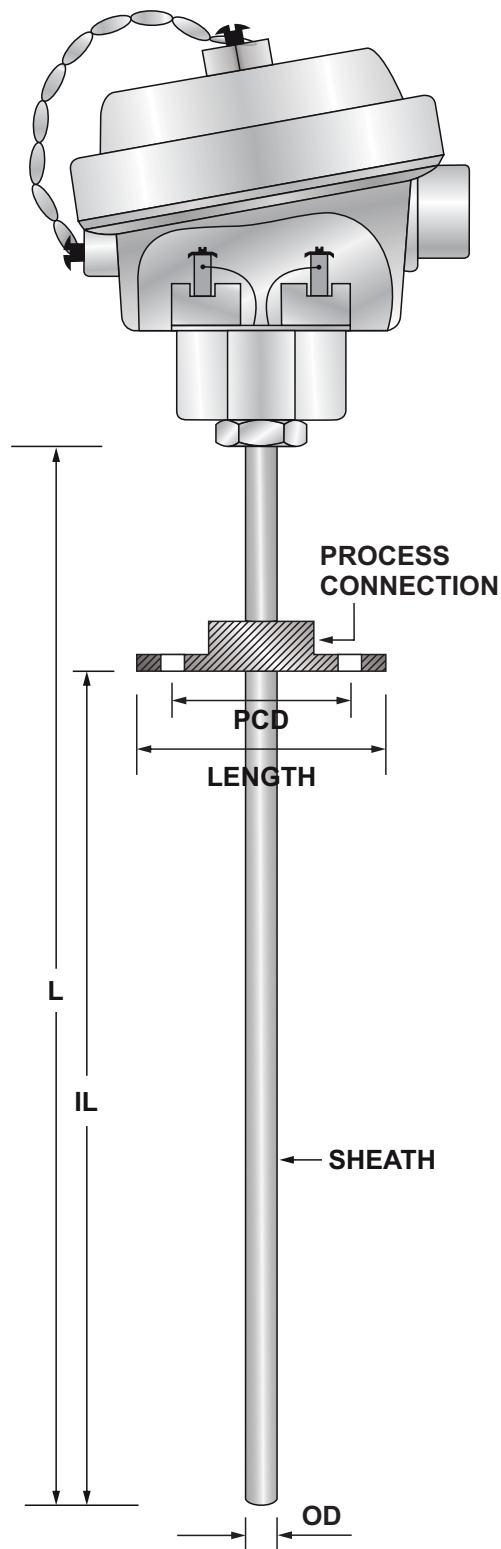

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material
(Flexible)

316	MI SS 316
310	MI SS 310
600	MI Inconel 600

Sheath "OD"

Specify

Process
Connection

OVAL FLANGE (ALUMINIUM)

Nominal
Length "L"

Specify

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net



THERMOCOUPLE TRANSITION JOINT TYPE

TC - 11

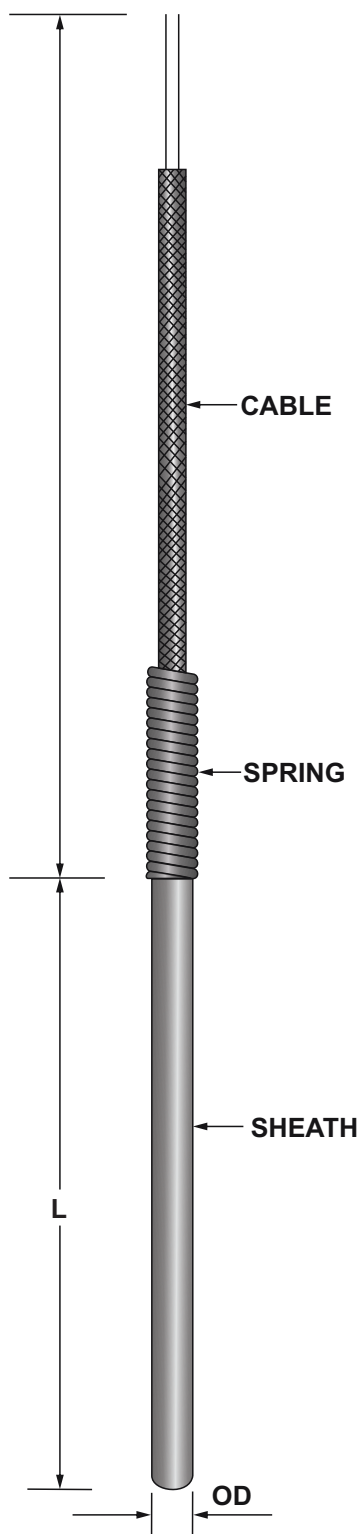

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
310	SS 310
600	Inconel 600

Sheath "OD"

4.7	4.7mm
6	6mm
8	8mm
O	Consult Factory

Type of Cable

A	PTFE / PTFE
B	FG / FG / SSB
O	Consult Factory

Length of Cable

Specify

Termination

Refer Termination Styles Sheet

Nominal
Length "L"

Specify

Process Precision Instruments

📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


☎ Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net



THERMOCOUPLE TRANSITION JOINT TYPE WITH FIXED FITTING

TC - 12

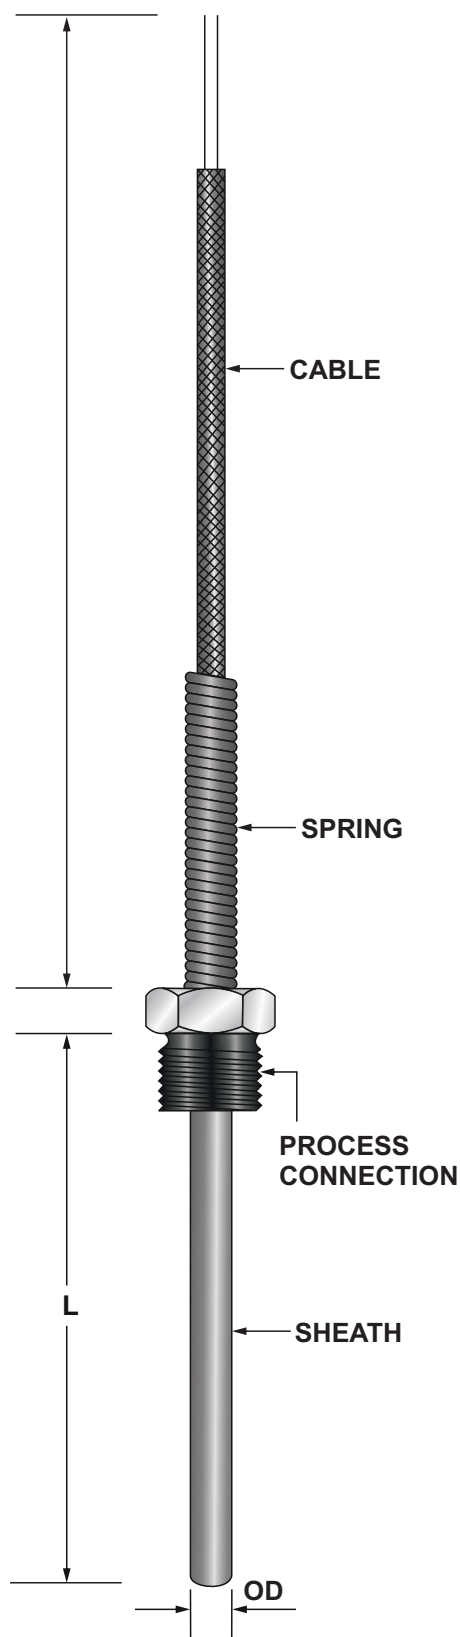

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
310	SS 310
600	Inconel 600

Sheath "OD"

4.7	4.7mm
6	6mm
8	8mm
O	Consult Factory

Process
Connection

Threads BSP / NPT	1/4"	3/8"	1/2"	3/4"
	1"	1 1/4"	1 1/2"	2"
M -Threads	M18 X 1.5		M20 X 1.5	
	M27 X 2		M33 X 2	
O	Consult Factory			

Type of Cable

A	PTFE / PTFE
B	FG / FG / SSB
O	Consult Factory

Length of Cable

Specify

Termination

Refer Termination Styles Sheet

Nominal
Length "L"

Specify

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net



THERMOCOUPLE TRANSITION JOINT TYPE WITH ADJUSTABLE FITTING

TC - 13

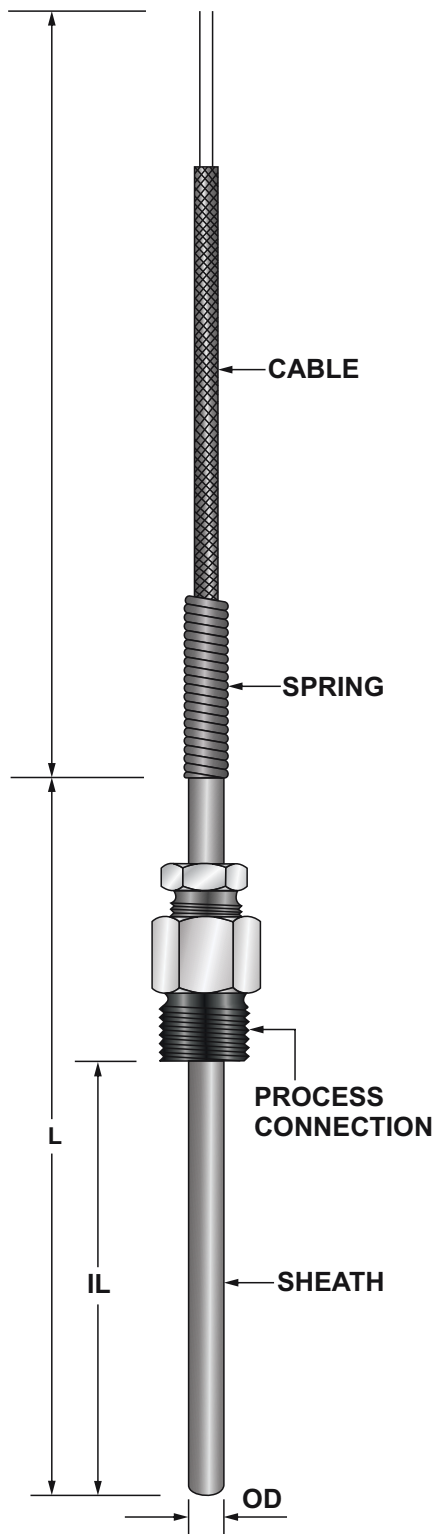

Element		<table><tr><td>K</td><td>Chromel / Alumel</td></tr><tr><td>J</td><td>Iron / Constantan</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	K	Chromel / Alumel	J	Iron / Constantan	O	Consult Factory														
K	Chromel / Alumel																					
J	Iron / Constantan																					
O	Consult Factory																					
Configuration		<table><tr><td>SX</td><td>Simplex</td></tr><tr><td>DX</td><td>Duplex</td></tr></table>	SX	Simplex	DX	Duplex																
SX	Simplex																					
DX	Duplex																					
Junction		<table><tr><td>GN</td><td>Grounded</td></tr><tr><td>UN</td><td>Ungrounded</td></tr></table>	GN	Grounded	UN	Ungrounded																
GN	Grounded																					
UN	Ungrounded																					
Temp. Range		Specify																				
Sheath Material		<table><tr><td>316</td><td>SS 316</td></tr><tr><td>310</td><td>SS 310</td></tr><tr><td>600</td><td>Inconel 600</td></tr></table>	316	SS 316	310	SS 310	600	Inconel 600														
316	SS 316																					
310	SS 310																					
600	Inconel 600																					
Sheath "OD"		<table><tr><td>4.7</td><td>4.7mm</td></tr><tr><td>6</td><td>6mm</td></tr><tr><td>8</td><td>8mm</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	4.7	4.7mm	6	6mm	8	8mm	O	Consult Factory												
4.7	4.7mm																					
6	6mm																					
8	8mm																					
O	Consult Factory																					
Process Connection		<table><tr><td>Threads BSP / NPT</td><td>1/4"</td><td>3/8"</td><td>1/2"</td><td>3/4"</td></tr><tr><td></td><td>1"</td><td>1 1/4"</td><td>1 1/2"</td><td>2"</td></tr><tr><td>M -Threads</td><td colspan="4">M18 X 1.5 M20 X 1.5 M27 X 2 M33 X 2</td></tr><tr><td>O</td><td colspan="4">Consult Factory</td></tr></table>	Threads BSP / NPT	1/4"	3/8"	1/2"	3/4"		1"	1 1/4"	1 1/2"	2"	M -Threads	M18 X 1.5 M20 X 1.5 M27 X 2 M33 X 2				O	Consult Factory			
Threads BSP / NPT	1/4"	3/8"	1/2"	3/4"																		
	1"	1 1/4"	1 1/2"	2"																		
M -Threads	M18 X 1.5 M20 X 1.5 M27 X 2 M33 X 2																					
O	Consult Factory																					
Type of Cable		<table><tr><td>A</td><td>PTFE / PTFE</td></tr><tr><td>B</td><td>FG / FG / SSB</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	A	PTFE / PTFE	B	FG / FG / SSB	O	Consult Factory														
A	PTFE / PTFE																					
B	FG / FG / SSB																					
O	Consult Factory																					
Length of Cable		Specify																				
Termination		Refer Termination Styles Sheet																				
Nominal Length "L"		Specify																				

Process Precision Instruments


📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

☎ Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net



TC - 14

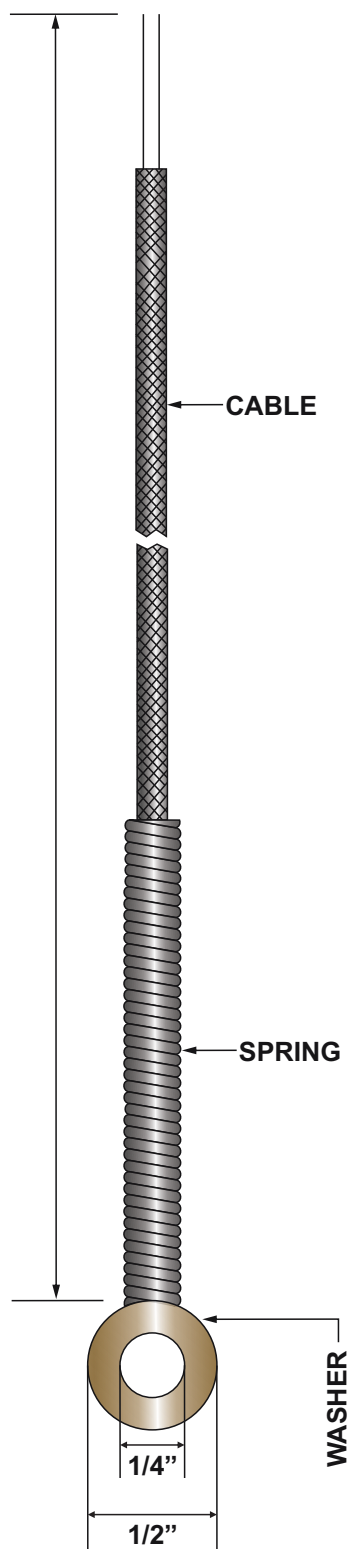

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Washer Material

B	Brass
O	Consult Factory

Washer "OD / ID"

A	1/2" / 1/4"
O	Consult Factory

Type of Cable

A	PTFE / PTFE
B	FG / FG / SSB

Length of Cable

Specify

Termination

Refer Termination Styles Sheet

Process Precision Instruments

📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


📞 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net



THERMOCOUPLE BAYONET (SPRING LOADED)

TC - 15

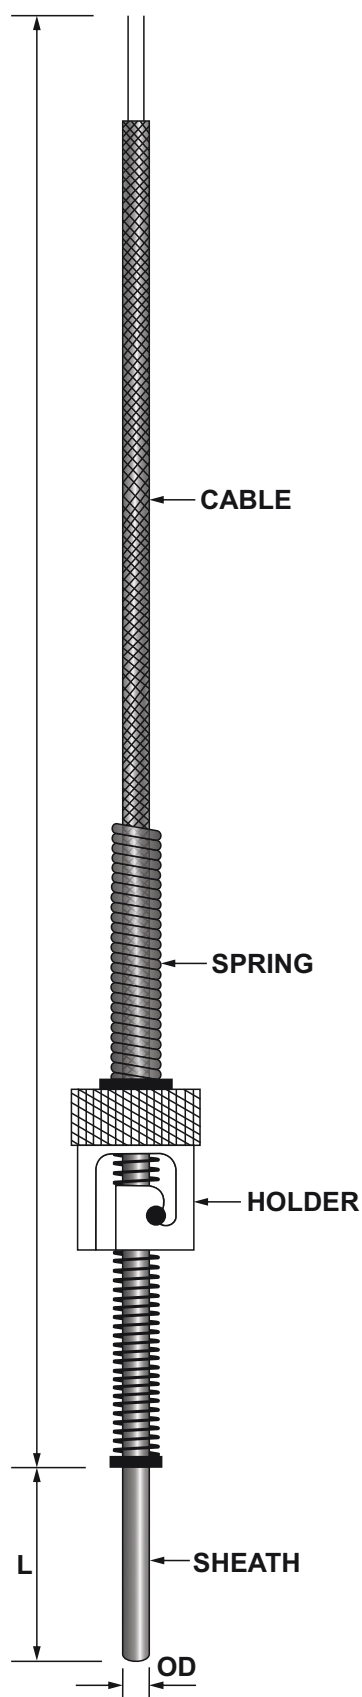

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
O	Consult Factory

Tip "OD"

3	3mm
4.7	4.7mm
6	6mm
O	Consult Factory

Tip "L"

Specify

Holder (ID)

A	1/2"
B	16mm
O	Consult Factory

Type of Cable

A	PTFE / PTFE
B	FG / FG / SSB
O	Consult Factory

Length of Cable

Specify

Termination

Refer Termination Styles Sheet

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net



THERMOCOUPLE BAYONET (SPRING LOADED) WITH ADOPTOR

TC - 16

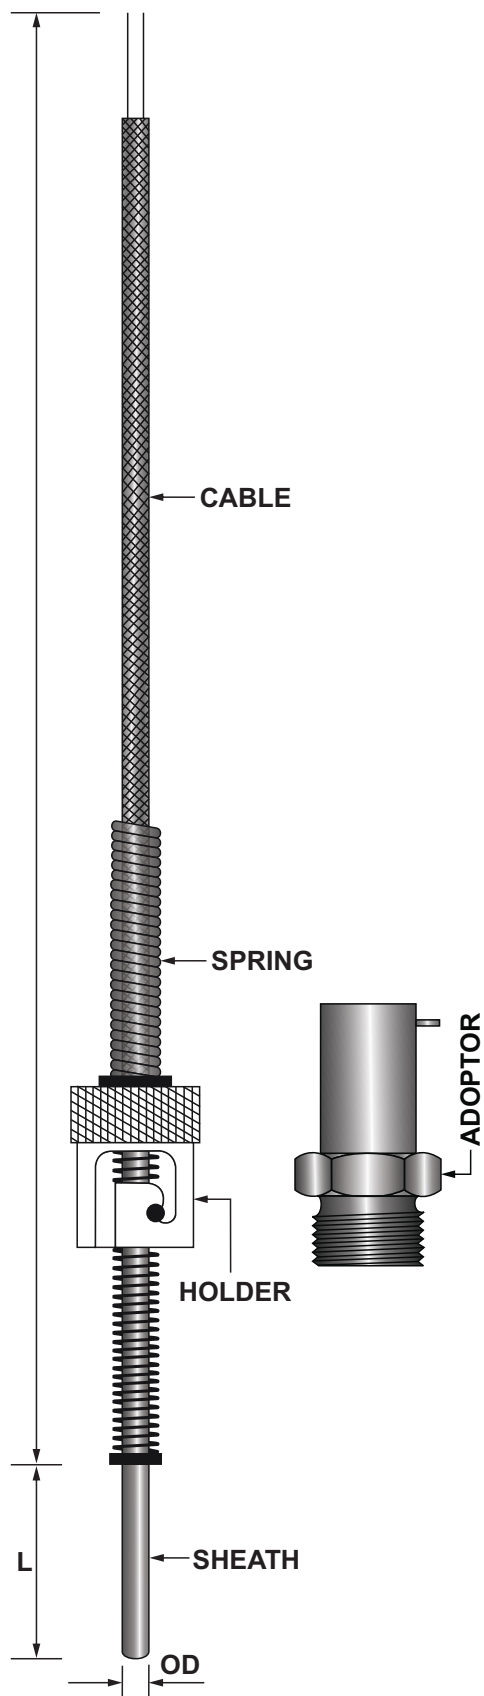

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
O	Consult Factory

Tip "OD"

3	3mm
4.7	4.7mm
6	6mm
O	Consult Factory

Tip "L"

Specify

Holder (ID)

A	1/2"
B	16mm
O	Consult Factory

Adaptor

A	1/8" BSP
B	1/2" BSW
C	M 12
D	M 14
O	Consult Factory

Type of Cable

A	PTFE / PTFE
B	FG / FG / SSB
O	Consult Factory

Length of Cable

Specify

Termination

Refer Termination Styles Sheet

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net



THERMOCOUPLE BAYONET (ADJUSTABLE)

TC - 17

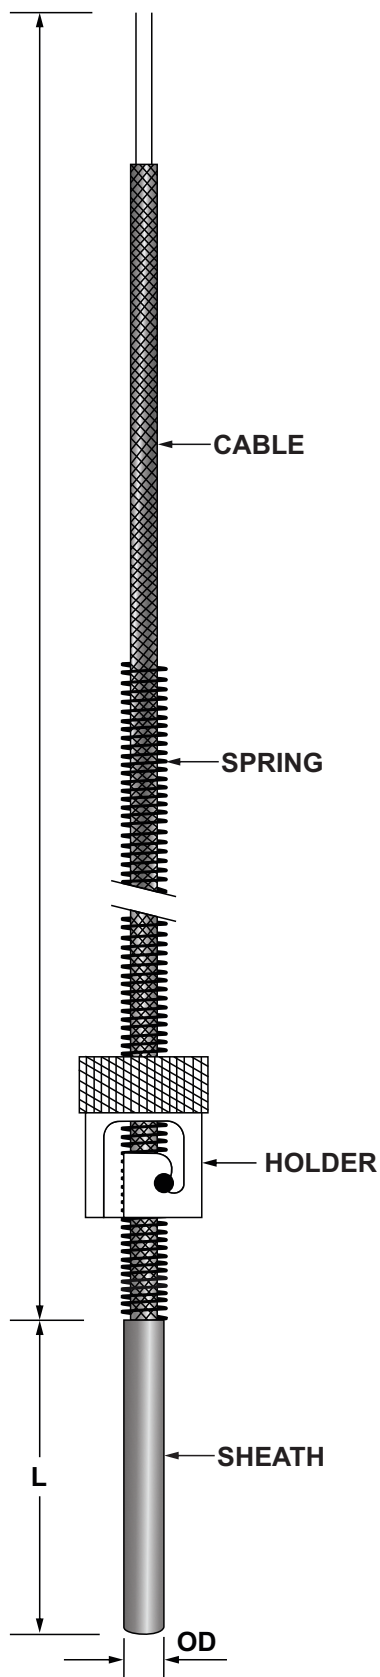


Element		<table><tr><td>K</td><td>Chromel / Alumel</td></tr><tr><td>J</td><td>Iron / Constantan</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	K	Chromel / Alumel	J	Iron / Constantan	O	Consult Factory		
K	Chromel / Alumel									
J	Iron / Constantan									
O	Consult Factory									
Junction		<table><tr><td>GN</td><td>Grounded</td></tr><tr><td>UN</td><td>Ungrounded</td></tr></table>	GN	Grounded	UN	Ungrounded				
GN	Grounded									
UN	Ungrounded									
Temp. Range		Specify								
Sheath Material		<table><tr><td>316</td><td>SS 316</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	316	SS 316	O	Consult Factory				
316	SS 316									
O	Consult Factory									
Tip "OD"		<table><tr><td>3</td><td>3mm</td></tr><tr><td>4.7</td><td>4.7mm</td></tr><tr><td>6</td><td>6mm</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	3	3mm	4.7	4.7mm	6	6mm	O	Consult Factory
3	3mm									
4.7	4.7mm									
6	6mm									
O	Consult Factory									
Tip "L"		Specify								
Holder (ID)		<table><tr><td>A</td><td>1/2"</td></tr><tr><td>B</td><td>16mm</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	A	1/2"	B	16mm	O	Consult Factory		
A	1/2"									
B	16mm									
O	Consult Factory									
Type of Cable		<table><tr><td>A</td><td>PTFE / PTFE</td></tr><tr><td>B</td><td>FG / FG / SSB</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	A	PTFE / PTFE	B	FG / FG / SSB	O	Consult Factory		
A	PTFE / PTFE									
B	FG / FG / SSB									
O	Consult Factory									
Length of Cable		Specify								
Termination		Refer Termination Styles Sheet								

Process Precision Instruments



THERMOCOUPLE BAYONET (ADJUSTABLE) WITH ADOPTOR

TC - 18

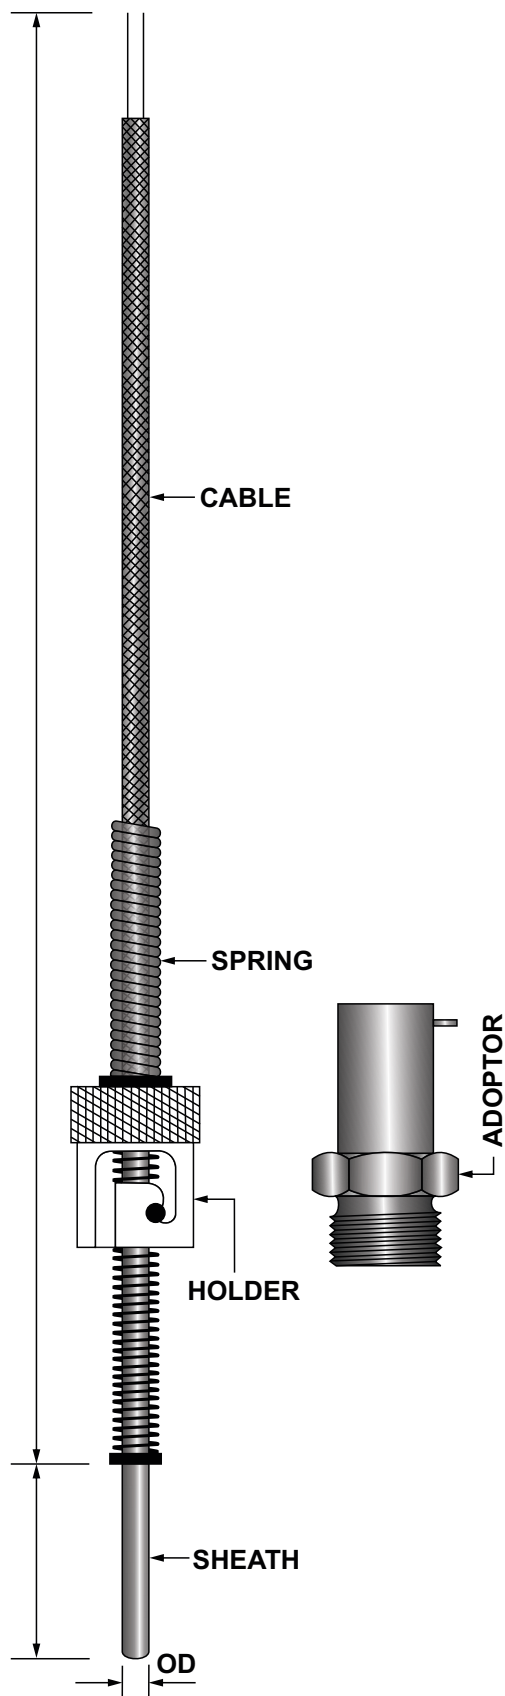


Element		<table border="1"><tr><td>K</td><td>Chromel / Alumel</td></tr><tr><td>J</td><td>Iron / Constantan</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	K	Chromel / Alumel	J	Iron / Constantan	O	Consult Factory				
K	Chromel / Alumel											
J	Iron / Constantan											
O	Consult Factory											
Junction		<table border="1"><tr><td>GN</td><td>Grounded</td></tr><tr><td>UN</td><td>Ungrounded</td></tr></table>	GN	Grounded	UN	Ungrounded						
GN	Grounded											
UN	Ungrounded											
Temp. Range		Specify										
Sheath Material		<table border="1"><tr><td>316</td><td>SS 316</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	316	SS 316	O	Consult Factory						
316	SS 316											
O	Consult Factory											
Tip "OD"		<table border="1"><tr><td>3</td><td>3mm</td></tr><tr><td>4.7</td><td>4.7mm</td></tr><tr><td>6</td><td>6mm</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	3	3mm	4.7	4.7mm	6	6mm	O	Consult Factory		
3	3mm											
4.7	4.7mm											
6	6mm											
O	Consult Factory											
Tip "L"		Specify										
Holder (ID)		<table border="1"><tr><td>A</td><td>1/2"</td></tr><tr><td>B</td><td>16mm</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	A	1/2"	B	16mm	O	Consult Factory				
A	1/2"											
B	16mm											
O	Consult Factory											
Adaptor		<table border="1"><tr><td>A</td><td>1/8" BSP</td></tr><tr><td>B</td><td>1/2" BSW</td></tr><tr><td>C</td><td>M 12</td></tr><tr><td>D</td><td>M 14</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	A	1/8" BSP	B	1/2" BSW	C	M 12	D	M 14	O	Consult Factory
A	1/8" BSP											
B	1/2" BSW											
C	M 12											
D	M 14											
O	Consult Factory											
Type of Cable		<table border="1"><tr><td>A</td><td>PTFE / PTFE</td></tr><tr><td>B</td><td>FG / FG / SSB</td></tr><tr><td>O</td><td>Consult Factory</td></tr></table>	A	PTFE / PTFE	B	FG / FG / SSB	O	Consult Factory				
A	PTFE / PTFE											
B	FG / FG / SSB											
O	Consult Factory											
Length of Cable		Specify										
Termination		Refer Termination Styles Sheet										

Process Precision Instruments

THERMOCOUPLE HEAD TYPE (CERAMIC SHEATHED)

TC - 19

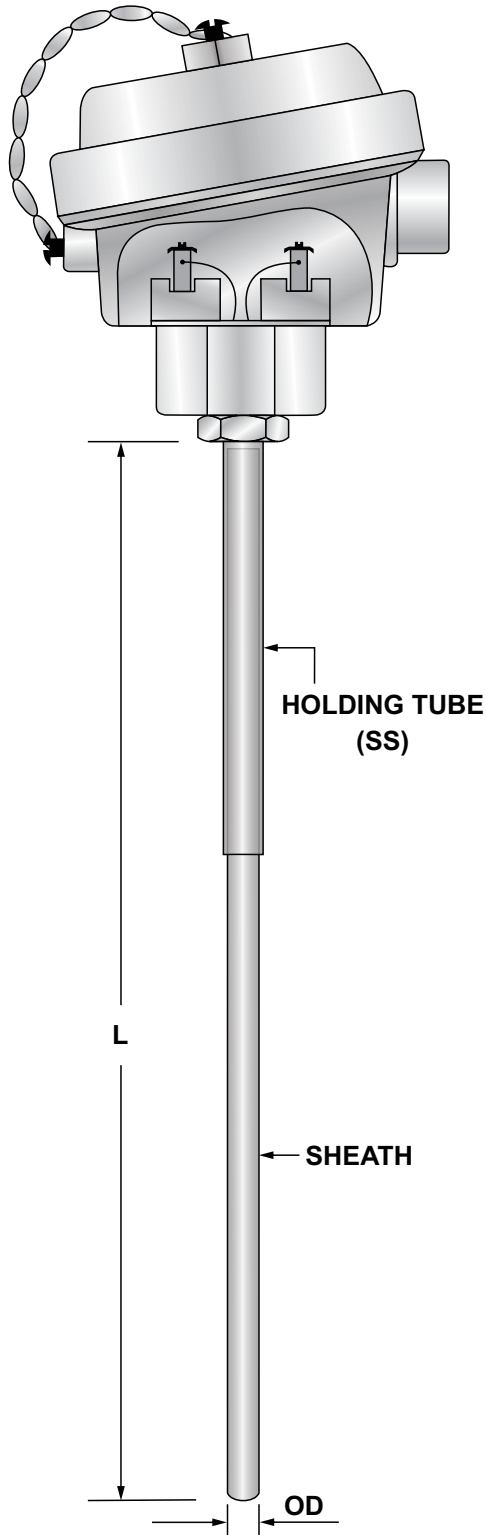

Element

K	Chromel / Alumel
R	Pt vs Pt 13% Rh
S	Pt vs Pt 10% Rh
B	Pt 6% Rh vs Pt 30% Rh

Configuration

SX	Simplex
DX	Duplex

Termination

W	Weather Proof Head IP-67
F	Ex. Proof Head IIA / IIB IP-66
O	Consult Factory

Temp. Range

Specify

Sheath Material

710	RCA 710
O	Consult Factory

Sheath "OD"

Specify

Nominal
Length "L"

Specify

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net



THERMOCOUPLE EXPOSED JUNCTION TYPE (BARE)

TC - 20

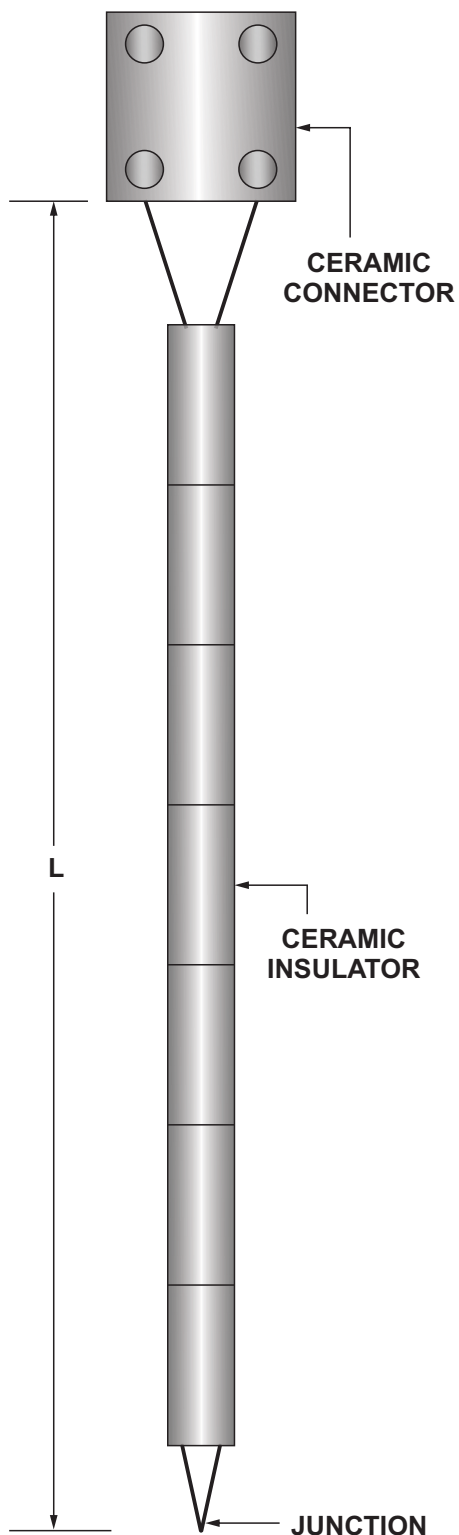

Element

K	Chromel / Alumel
O	Consult Factory

Termination

A	Ceramic Connector
B	Bare Leads

Temp. Range

Specify

Sheath Material

Ceramic Insulator

Nominal
Length "L"

Specify

Process Precision Instruments

📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India


📞 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net



THERMOCOUPLE TERMINAL BLOCK PROBE

TC - 21

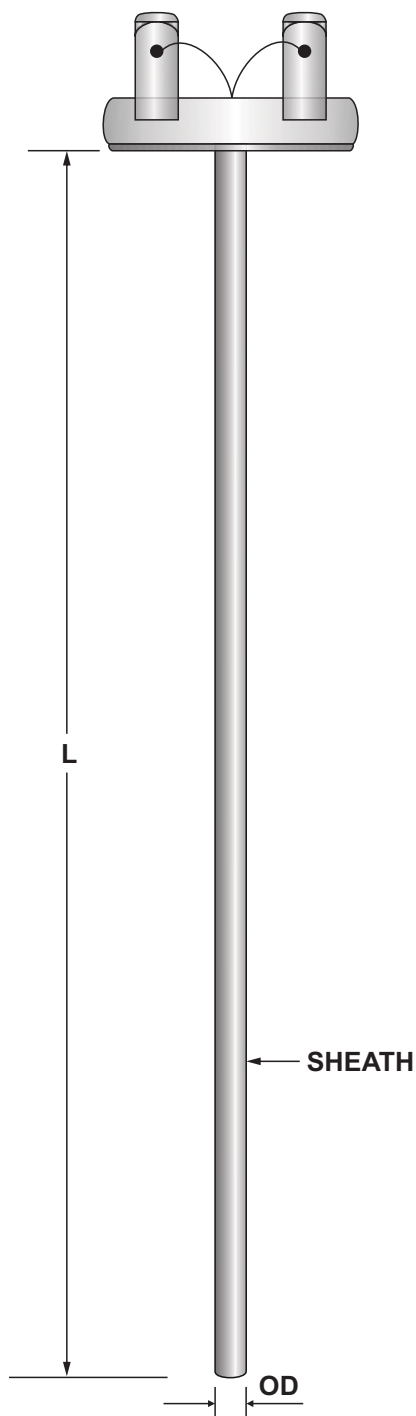

Element

K	Chromel / Alumel
J	Iron / Constantan
O	Consult Factory

Configuration

SX	Simplex
DX	Duplex

Termination

Ceramic Block with Terminals

Junction

GN	Grounded
UN	Ungrounded

Temp. Range

Specify

Sheath Material

316	SS 316
310	SS 310
600	Inconel 600

Sheath "OD"

4.7	4.7mm
6	6mm
8	8mm
O	Consult Factory

Nominal
Length "L"


Specify

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

sales@ppiindia.net www.ppiindia.net

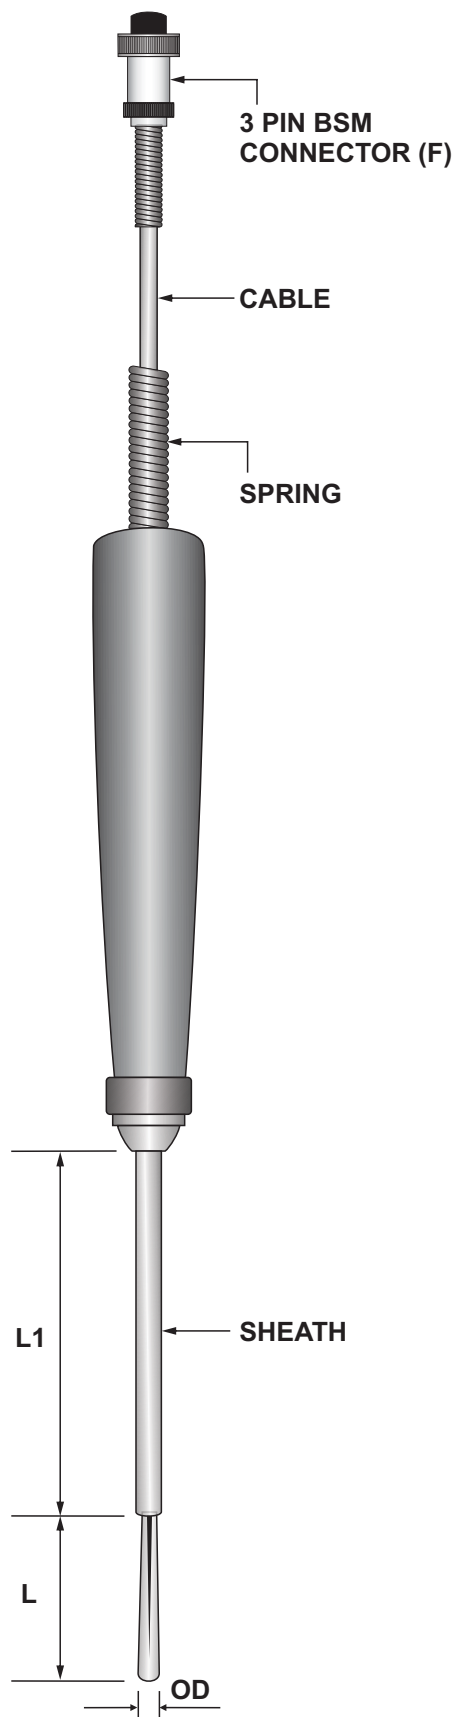

TC - 22

Element		K	Chromel / Alumel
Temp. Range		T1	400°C
		T2	800°C
Sheath Material		316	SS 316
Sheath "OD"		8	8mm (for 400°C)
		9.5	9.5mm (for 800°C)
Type of Cable			PVC / PVC
		O	Consult Factory
Lenght of Cable			1Mtr
		O	Consult Factory
Termination			3 Pin BSM Connector (F)
Nominal Length "L"		L	35mm (for 400°C)
			50mm (for 800°C)
Sheath Nominal Length		L1	110mm (for 400°C)
			300mm (for 800°C)

Process Precision Instruments


📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

📞 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net

THERMOCOUPLE GENERAL PURPOSE IMMERSION PROBE

TC - 23

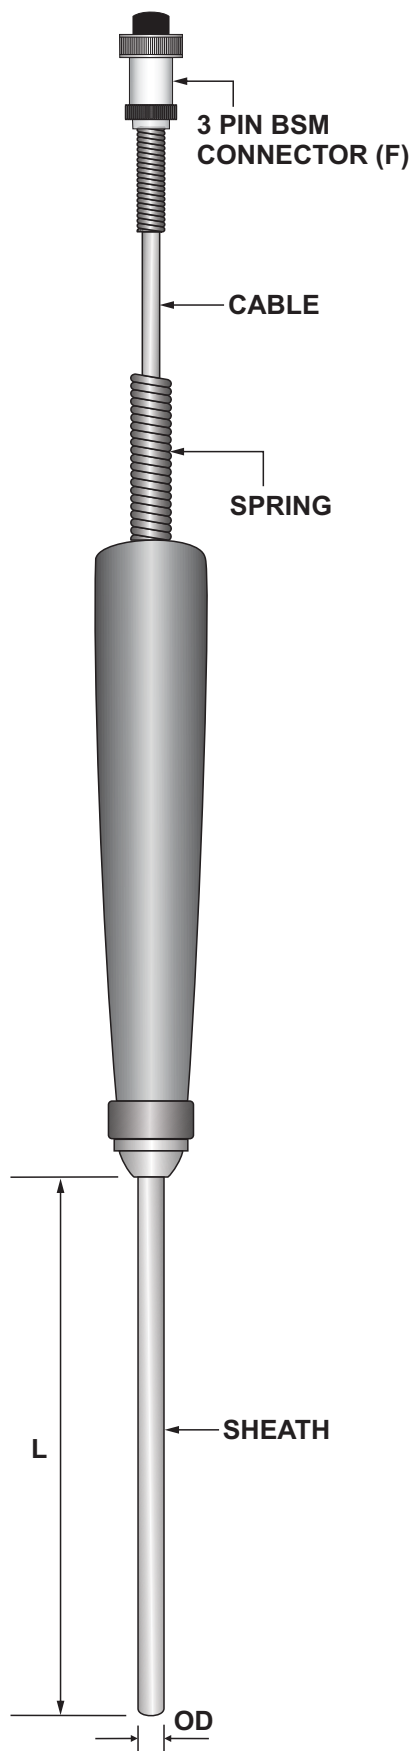


Element		K	Chromel / Alumel
Temp. Range		T1	600°C
		T2	1100°C
		O	Consult Factory
Sheath Material		316	SS 316
		M316	MI 316
		600	MI INC 600
		O	Consult Factory
Sheath "OD"		3	3mm
		4	4mm
		6	6mm
		O	Consult Factory
Type of Cable		PVC / PVC	
		O	Consult Factory
Length of Cable		1 Mtr	
		O	Consult Factory
Termination		3 Pin BSM Connector (F)	
Nominal Length "L"		300	300mm
		450	450mm
		O	Consult Factory

Process Precision Instruments

101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India
 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333
 sales@ppiindia.net www.ppiindia.net



TC - 24

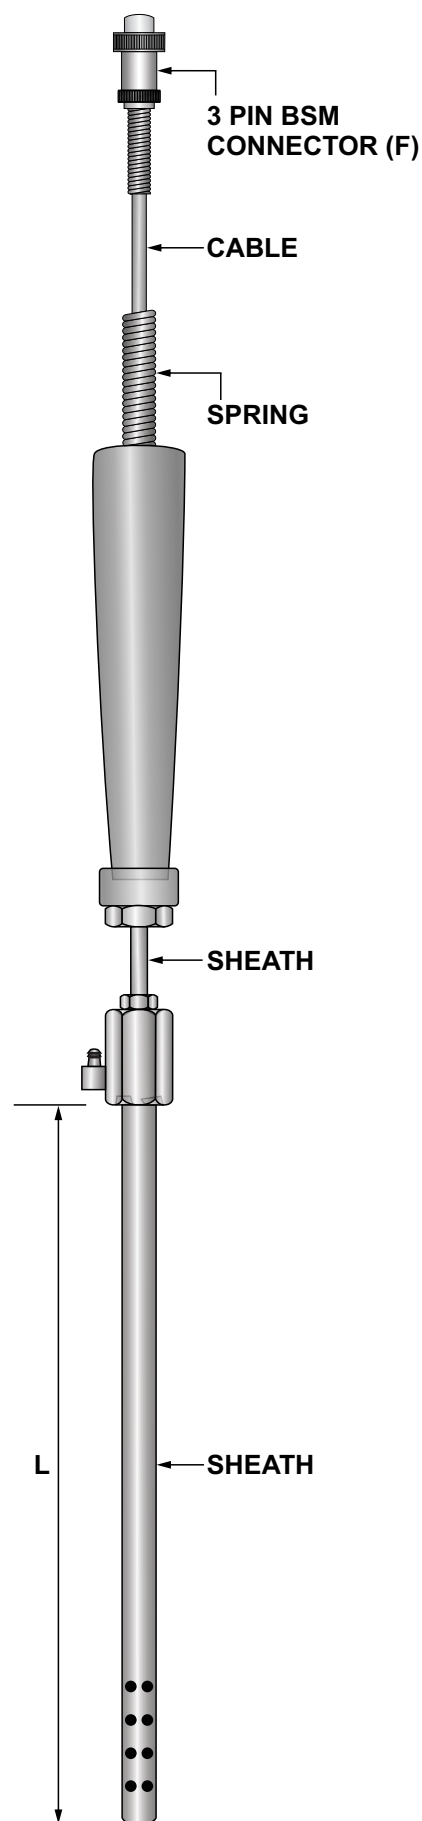

Element		K	Chromel / Alumel
Temp. Range		T1	400°C
		T2	800°C
Sheath Material		316	SS 316
Sheath "OD"		8	8mm (for 400°C)
		9.5	9.5mm (for 800°C)
Type of Cable			PVC / PVC
		O	Consult Factory
Length of Cable			1Mtr
		O	Consult Factory
Termination			3 Pin BSM Connector (F)
Nominal Length "L"		L	35mm (for 400°C)
			50mm (for 800°C)
Sheath Nominal Length		L1	110mm (for 400°C)
			300mm (for 800°C)

Process Precision Instruments


📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

📞 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net



TC - 25

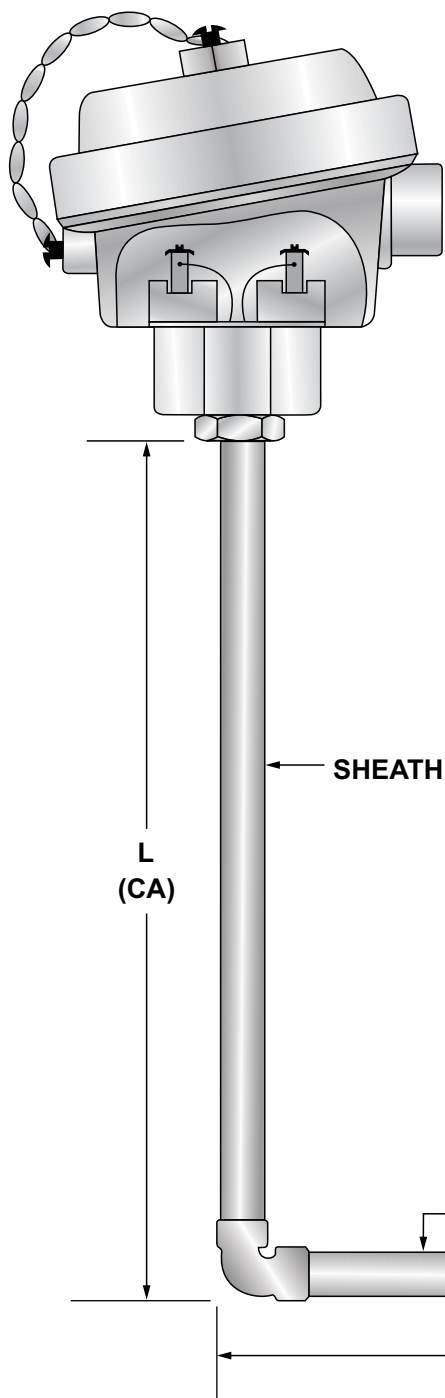

Element		K	Chromel / Alumel
Configuration		SX	Simplex
		DX	Duplex
Termination		W	Weather Proof Head IP-67
		F	Ex. Proof Head IIA / IIB IP-66
		O	Consult Factory
Junction		GN	Grounded
		UN	Ungrounded
Temp. Range		Specify	
Sheath Material		316	SS 316
		310	SS 310
		600	Inconel 600
Sheath "OD"		19	19mm
		O	Consult Factory
Nominal Length "L"		HA	Specify
		CA	Specify

Process Precision Instruments

📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India

📞 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333

✉ sales@ppiindia.net 🖱 www.ppiindia.net