

### Highlights

- 4 / 8 / 12 / 16 Channel Versions
- View & Store Min/Max Process Values Amongst All Channels
- 4 Programmable Alarms for Each Channel
- 4 Common Alarm Relay Outputs (1 per Soft Alarm) OR Up to 16 Independent Alarm Relay Outputs (1 per Channel)
- Front Panel Alarm Status LEDs & Acknowledge Key
- PC Software for Online Data Monitoring & Recording

### Features

- Universal Temperature Input (Thermocouples, RTD Pt100) for Each Channel (No Jumper Setting)
- Fast Channel Update Rate : 0.25 Seconds per Channel
- Auto/Manual Display Scan Mode with Programmable Scan Rate
- Units (°C / °F) and Resolution (1 / 0.1) Selection for Each Channel
- Zero Offset Adjustment for Each Channel
- RS485 MODBUS/RTU Serial Communication Port
- Universal Supply Voltage : 85~264 VAC, 50/60 Hz
- DIN Standard Dimensions (mm) : 96(H) X 192(W) X 100(D)
- Flame-proof Enclosure (Gas Group IIA & IIB) Available

### PC Software

- Supports Multiple Scanners
- Auto startup of Software on PC Power up
- Programmable Recording Interval, Channel Naming & Grouping
- Recording of Process Values and Alarm Status
- Online Data Display in Tabular and Graphical Forms with Alarm Indications
- Multi-Level Password Protected Access
- Manual and Auto backup Facility with Archiving
- Data Log Reports for User Selected Parameters & Channels with Configurable Title, Header & Footer
- Selectable Date-Time Format in Reports
- Data Log Report, Alarm Log Report, History Graph & Audit Trail Report in PDF & EXCEL Formats

**FREE**  
Data Logging  
Software



### Specifications

Display	
Digital Readout	Upper Readout : 5 digits, 0.39" Bright Red LED, 7 Segment Lower Readout : 4 digits, 0.39" Luminous Green LED, 7 Segment
Status Indicators	16 Red LEDs for Alarm Status Indications 2 Red LEDs for °C / °F Selection Indication 2 Red LEDs for Auto / Manual Selection Indication
Keys	
Type	6 Tactile Switches
Functions	PAGE, DOWN, UP, ENTER, Alarm ACK, A/M Select

<b>Channels</b>	
Numbers	4, 8, 12 or 16
Display Scan Mode	Auto : Programmable Scan Time (1 to 99 Seconds) Manual : UP/DOWN Keys for Channel Selection
<b>Sensor Input</b>	
Type (Programmable for each Channel)	Thermocouple : J, K, T, R, S, B, N RTD Pt100, 3 wire
Corrections	<ul style="list-style-type: none"> <li>In-built Cold-Junction Compensation for Thermocouples</li> <li>In-built Lead Resistance Compensation for RTD (Upto 22 <math>\Omega</math> in each lead)</li> </ul>
Accuracy	$\pm 0.25\%$ of reading $\pm 1$ ( $^{\circ}\text{C}$ / $^{\circ}\text{F}$ )
Display Range	Refer Table 1 for Thermocouples & RTD Inputs
Display Resolution	User Programmable for Each Channel : 0.1 / 1 ( $^{\circ}\text{C}$ / $^{\circ}\text{F}$ )
Zero Offset	User Adjustable over Full Range for Each Channel
ADC	16 Bit ( $\pm 32,768$ Counts), Sigma-Delta ( $\Sigma\Delta$ )
Channel Update Time	500mS per Channel (8 Seconds for 16 Channels)
Input Resistance	> 8 Mohm
Common Mode Rejection	> 100dB at 50/60 Hz
Signal Conditioning	L-C Analog Filter
<b>Alarms</b>	
Numbers	4, Independent for Each Channel
Programmable Parameters (For Each Alarms)	Type : Process Low, Process High Logic : Normal, Reverse Hysteresis : 1 to 3000 Unit Counts Inhibit : No, Yes
Outputs	4 Common Alarm Relay Outputs (1 per Soft Alarm) <b>OR</b> Up to 16 Independent Alarm Relay Outputs (1 per Channel)
<b>Outputs</b>	
Relay	Contact Type : Potential-free Change-over Contacts Contact Rating : 5A Resistive @ 120/240 Vac Contact Life : > 5,00,000 Operations at Rated Voltage / Current
<b>Serial Communication</b>	
Port	RS485, 2-wire, Half Duplex, Start-Stop Synchronized
Protocol	Modbus RTU
Baud Rate	Settable : 4800, 9600, 19200, 38400, 57600
Parity	Settable : None, Even, Odd
Max. Units per Loop	31
Max. Distance	1200 Metres


<b>Power Supply</b>	
Type	Switch Mode (SMPS)
Line Voltage	85~264 VAC, 50/60Hz
Consumption	5VA Max
<b>Physical</b>	
Mounting	Plug-in with Panel Mounting Clamps
Overall Dimensions	96(H) X 192(W) X 100(D), mm
Panel Cutout	92(H) X 184(W), mm
Terminals	Screw Type
Weight	1000 gm (1 Kg), Appx.
<b>Environmental</b>	
Operating Ambient	0~55°C & 5~90%RH Non-condensing
Storage Temperature	-10 to +70 °C
Atmospheres	Not Suitable for use in Corrosive or Explosive Atmospheres. The Panel in which the Instrument is Mounted must be free of Electrically Conductive Pollution.
<b>PC Interface with 21 CFR Compliant Software</b>	
Supported Operating Systems (OS)	<ul style="list-style-type: none"> <li>• Windows Vista</li> <li>• Windows 7</li> <li>• Windows 8 (32 bit / 64 bit)</li> <li>• Pentium Dual Core (32 bit / 64 bit)</li> </ul>
Minimum PC Configuration Requirements	<ul style="list-style-type: none"> <li>• 2.8 GHz Clock Speed</li> <li>• 2 GB RAM</li> <li>• 40 GB Hard Disk</li> </ul>

**Table 1 : Temperature Ranges for Thermocouples & RTD**

<b>Input Type</b>	<b>Range (Min. to Max.)</b>
Type J Thermocouple (Fe-K)	0 to +960°C / +32 to +1760°F
Type K Thermocouple (Cr-Al)	-200 to +1376°C / -328 to +2508°F
Type T Thermocouple (Cu-Con)	-200 to +385°C / -328 to +725°F
Type R Thermocouple (Pt/Pt-Rh13%)	0 to +1770°C / +32 to +3218°F
Type S Thermocouple (Pt/Pt-Rh10%)	0 to +1765°C / +32 to +3209°F
Type B Thermocouple	0 to +1825°C / +32 to +3092°F
Type N Thermocouple	0 to +1300°C / +32 to +2372°F
3-wire, RTD Pt100	-199 to +600°C / -328 to +1112°F


# Back Panel Terminations

## Old Version

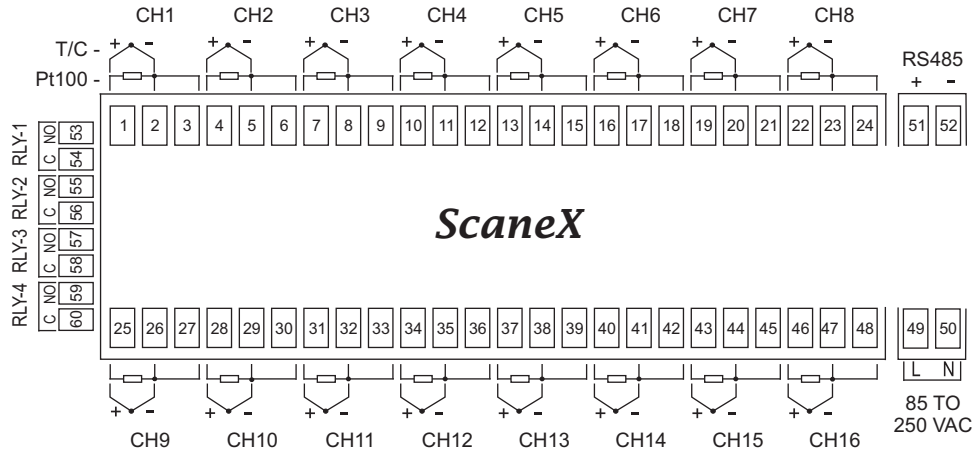

## ScanEX

## New Version

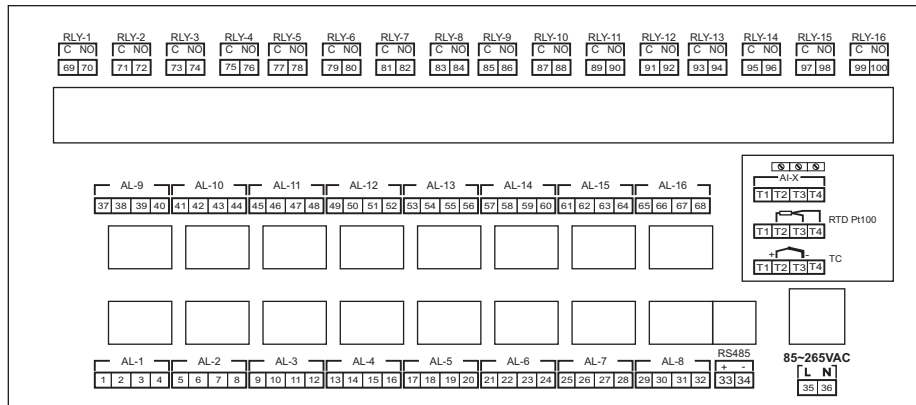

## Ordering Code

Input*		Channels		Alarm Outputs		Power Supply	
TC	Thermocouple	4	4 Channels	C	4 Common Relays	0	85~264 VAC
PT	RTD Pt100	8	8 Channels	D	4 / 8 / 12 / 16 Independent depending on Channels		
		12	12 Channels				
		16	16 Channels				

\* Input type is universal and user programmable. The ordering code only implies the factory settings at the time of dispatch.

### Example Code TC - 16 - C - 0

Thermocouple Input, 16 Channels, 4 Common Alarm Relays, 85~264 VAC supply voltage