



## Site-Log LRHT-1 / LRHT-2 Data Logger

### Product Specifications



#### OVERVIEW

The Site-Log LPTH-1 (internal sensor) /LRHT-2 (external sensor) is an 2-channel, battery powered, stand alone data logger. The logger records up to 4 mega-byte of relative humidity, temperature data and stores it in non-volatile flash memory for later retrieval.

Featuring an aluminum enclosure and conformal coating PCB, the Site-Log data logger has excellent performance in the harshest industrial environment.

Powered by Sensirion high performance digital temperature and RH sensor, the LRHT-1/LRHT-2 logger is well suited to science and laboratory applications where precise and accurate measurement is critical.

#### FEATURES

##### High Data Resolution:

The 16-bit analog-to-digital converter meets most high-resolution requirements.

##### Large Memory Size:

The 8-Mega-Byte Memory stores years of measurements.


##### Programmable Input Ranges:

One on-board thermistor channel monitors ambient temperature. Seven range-programmable voltage external input channels cover wide measurement requirements.

##### Multiple Communication Interfaces:

The Site-Log data loggers can be accessed via USB or Ethernet connections with auto baud rate of up to 115 kbps.

Its on-board TTL serial port and USB interfaces meet most communication requirements.

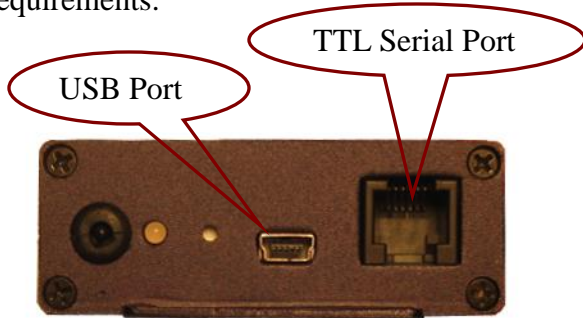

### 5-Year Battery Life:

The internal lithium battery provides over 5 years of instantaneous logging operation when sampling at an interval of one minute.

### Fast Sampling Mode:

The Site-Log data loggers can log data with the sampling interval as fast as 20 milliseconds, replacing data acquisition devices.

### Alarm Control Output:

The LRHT-1/LRHT-2 data logger notifies the alarm condition over alarm terminal strips or communication lines. (USB, Serial Port)



### Rugged Physical Design:

The rugged aluminum enclosure and coated PCB makes the Site-Log data loggers perfect in the harshest industrial environment.




### Powerful Software:

SiteView is a Windows-based application which works with the Site-Log Series data loggers for downloading, configuration, data analyzing and plotting.

Its user-friendly graphic interface plus powerful functionalities fit both novice and advanced users.

The versatility of custom equation and custom-line equation handle complicated measurement requirements.

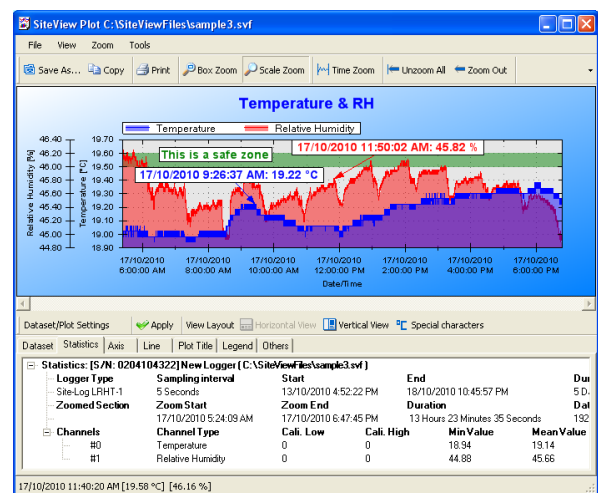

## SPECIFICATIONS

<b>Product Identification</b>	
Product Name	Site-Log
Model	LRHT-1 (internal sensor), LRHT-2 (external sensor)
<b>Inputs</b>	
Connections	Pluggable terminal block for alarm1 and alarm2 controls.
Channels	CH0: Temperature(-40°C ~ 70°C, -40°F ~ 158°F) CH1: Relative Humidity(0 ~ 100% RH)
Resolution	0.025%
Accuracy	Temperature: +/- 0.4°C at 25°C Relative Humidity: +/-3% (20% ~ 80% RH)
<b>Alarms</b>	
Channel Alarms	Two editable alarm thresholds per channel.
Alarm Outputs	ALARM1 & A2/EXT terminal strips can be configured as alarm outputs. Alarm-On: MOSFET(N-Channel) switch on. Alarm-Off: MOSFET(N-Channel) switch off. Max Power: 200mA @ 24VDC. With purchase of SiteView software, the Site-Log can report alarm status to host PC via USB, Modem or Ethernet Device Server.
Alarm-On Delay:	Programmable 0 - 10 minutes delay with 1-minute increments.
Alarm Indicator	On-board LED lights in red when in alarm condition.
<b>On-board Memory</b>	
Capacity	4 Mega bytes (2 Mega measurements).
Data Retention	Over 20 years.
<b>Sampling &amp; Logging</b>	
Sampling Interval	1 second to 12 hours user selectable.
Logging Mode	Stop recording or FIFO when memory is full.
Logging Activation	Programmable instant, start delay or field push-button activation.
<b>Communications</b>	
Interface	USB(USB cable included). AUX(RJ11) for direct TTL level communications. With purchase of DeviceServer Kit, the Site-Log logger can be connected to Ethernet for remote access.
Baud Rate	Auto-detect baud rate from 2400 to 115200 bps on both USB and AUX ports.
<b>Battery</b>	
Power	Built-in 3.6V Lithium Battery.
Life Cycle	5 years based on 1 minute sampling interval.

<b>Software</b>	
SiteView <sup>[1]</sup>	Configuration, downloading, plotting, real-time view, custom calibration and custom equation.
Software Requirements	Computer with 1.0 GHz or faster processor 256 MB Memory or higher 1.0 GB of available hard-drive space or higher Windows XP with SP2 or later, Vista, Window 7 At least one USB port or one COM port
<b>Physical</b>	
Material	Aluminum enclosure.
PCB Treatment	Conformal coating.
Dimension	88 X 64.2 X 24 mm (3.46 X 2.53 X 0.95 inches)
Weight	150g.
Mounting	Probe/Wall-mount holes for hanging/mounting.
<b>Others</b>	
LED Indicator	Tri-Color LED: (can be disabled for power saving) Normal Sampling: green when sampling Alarm: red when sampling Low Battery: amber when sampling.
Operating Environment	-40 ~ +70°C (-40°F ~ 158°F), 0~95%RH non-condensing.
Clock Accuracy	+/- 1 minute per month.
Approvals	CE, FCC

[1]: Sold separately.

## LOGGING CAPACITY TABLE

Sampling Interval	Enabled Channel	Logging Capacity	Sampling Interval	Enabled Channel	Logging Capacity
1 minute	1	3.98 years	1 second	1	24 days
1 minute	2	727 days	1 second	2	12 days
1 minute	8	181 days	1 second	8	3 days
10 seconds	1	242 days	100 ms	1	58 hours
10 seconds	2	121 days	100 ms	2	29 hours
10 seconds	8	30 days	100 ms	8	7.2 hours