

High Temperature Pressure Transmitters

SPT 900HT

Integrated Heat-Sink for High Temperature Media up to 260°C
Wide Pressure Range from -1 to 1000 bar
4-20 mA / 0-5 V / 0-10 V / MODBUS RTU Output Types
12 to 36 VDC Wide Supply Voltage Range

Process Precision Instruments

Vasai Road (E), Dist. Palghar - 401210,
Maharashtra, India

www.ppiindia.net



Salient Features

- Integrated Heat-Sink Design Ensures Stable Performance in High-Temperature Media up to 260°C
- Robust Structure Suitable for Measuring Steam, Hot Oil, and High-Temperature Gases
- Wide Pressure Range From -1 to 1000 bar
- Pressure Form: Gauge Pressure (G) & Absolute Pressure (A)
- Output Versions: 4-20 mA (2-wire), 0-5V / 0-10V (3-wire), RS485 MODBUS RTU (4-wire)
- Accuracy: $\pm 0.5\%$ F.S. (Typical)
- Operating Ambient Temperature: -20°C to +85°C
- Electrical Connection: DIN43650 Big Hirschmann Connector
- Process Connection: 1/4" BSP, 1/2" BSP, 3/4" BSP, 1" Triclover Flange
- Protection Class / Certificates: IP65 / RoHS & CE
- Supply Voltage: 12 to 36 VDC, Typical

General Information

Product Type General Purpose Pressure Transmitter

Ordering Code

SPT 900HT- [] - [] - [] - [] - []

Pressure Connections (BSP)

A : 1/4", B : 1/2", C : 3/4", D : 1" Triclover

Output

C : 4 to 20 mA

V5 : 0 to 5V

V10 : 0 to 10V

RS : RS485 MODBUS RTU

Pressure Range

Refer Table 1

Max Temperature

H : 180°C UH : 260°C

Display

0 : None 1 : LED Display (7 Segment)

Example : SPT 900HT-A-C-9-UH-0

Connection : 1/4", Output : 4 to 20 mA, Range : 0 to 16 Bar,
Max Temperature : 260°C, No Display

Quantity 1 Unit

General Specifications

Working Temperature	-20 to 85 °C
Storage Temperature	-40 to 100 °C
Certification	RoHS, EU Electrical Safety Standard CE


Pressure Specifications

Measurement Range	-1 to 1000 Bar
Overload Pressure	1.5 Times Rated Pressure
Accuracy	± 0.5% F.S. Measured at 25 °C, including the comprehensive accuracy of linearity, repeatability and hysteresis.
Stability	< 0.5 % F.S. / Year
Measurement Medium	Gas or Liquid Compatible with SS 304 and 316L Stainless Steel, Fluorine Rubber or Nitrite Rubber
Medium Temperature	5 Fins Heat-Sink : 180°C 10 Fins Heat-Sink : 260°C
Pressure Connection	¼" BSP, ½" BSP, ¾" BSP, 1" Triclover Flange
Pressure Form	Gauge Pressure (G) & Absolute Pressure (A)

Electrical Specifications


Output	4-20 mA (2-wire), 0-5V / 0-10V (3-wire), RS485 MODBUS RTU (4-wire)
Supply Voltage	8 to 36 VDC (For 4 to 20 mA & 0 to 5 VDC Outputs) 12 to 36 VDC (For 0 to 10 VDC Output) 10 to 30 VDC (For RS485 MODBUS RTU Output)
Electrical Connection	DIN43650 Big Hirschmann Connector
Enclosure Protection	IP65

Dimensions (mm)

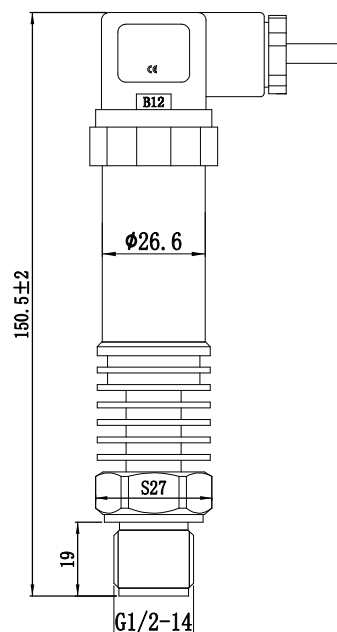


Wiring Instructions


2-Wire Current Output



3-Wire Voltage Output



4-Wire RS485 MODBUS RTU



Standard Ranges

Ordering Code	Pressure Range
1	0 to 0.1 Bar
2	0 to 0.25 Bar
3	0 to 0.5 Bar
4	0 to 1 Bar
5	0 to 2 Bar
6	0 to 4 Bar
7	0 to 6 Bar
8	0 to 10 Bar
9	0 to 16 Bar
10	0 to 25 Bar
11	0 to 30 Bar
12	0 to 40 Bar
13	0 to 50 Bar
14	0 to 80 Bar
15	0 to 100 Bar

Ordering Code	Pressure Range
16	0 to 200 Bar
17	0 to 500 Bar
18	0 to 600 Bar
19	0 to 1000 Bar
20	-1 to 0 Bar
21	-1 to 3 Bar
22	-1 to 6 Bar
23	-1 to 15 Bar
24	-1 to 20 Bar
25	-1 to 34 Bar

Non Standard Ranges on Request.

Process Precision Instruments (An ISO 9001 : 2008 Company)

📍 101, Diamond Industrial Estate, Navghar, Vasai Road (E), Dist. Palghar - 401210, Maharashtra, India
 📞 Sales : 8208199048 / 8208141446 Support : 07498799226 / 08767395333
 ✉️ sales@ppiindia.net 🖱️ www.ppiindia.net